




FA series

M18 photoelectric sensors DC



M18 cylindrical DC

features

- Complete range of M18 sensors with 10...30 Vdc power supply
- Axial and radial optic with flat surface
- Retro-reflective models for transparent objects detection, with red emission
- IP67 protection degree
- Metallic or plastic housing
- Sensitivity adjustment available for all models
- Total protection against any type of electric damages
- Approvals: CE and cULus listed

web contents



- Application notes
- Photos
- Catalogue / Manuals



code description (*)

		FA	I	C	/	B	P	-	0	A
series		FA	M18 sensor with 4 DC wires							
emission		I	Infrared invisible led emission							
		R	Red visible led emission							
type		2	100 mm Direct reflection without adjustment							
		3	100 mm Direct reflection with adjustment							
		4	200 mm Direct reflection with adjustment							
		5	200 mm Direct reflection without adjustment							
		6	400 mm Direct reflection without adjustment							
		7	400 mm Direct reflection with adjustment							
		8	Direct reflection: 1000 mm axial, 800 mm radial with adjustment							
		C	Reflex without adjustment							
		P	Reflex polarized without adjustment							
		N	Reflex polarized with adjustment							
		M	Reflex with adjustment							
		L	Reflex with adj. for transparent objects detection							
		H	Emitter							
		D	Receiver with sensitivity adjustment							
		Z	Receiver without sensitivity adjustment							
emitter		0	Emitter							
		X	Emitter with check							
		B	4 wires output complementary NO and NC							
output		0	Emitter							
		P	PNP output							
		N	NPN output							
housing		0	Plastic housing, axial optic							
		1	Metal housing, axial optic							
		2	Plastic housing, radial optic							
		3	Metal housing, radial optic							
plug / cable output		A	Axial cable output							
		E	Axial M12 plastic connector output							

201601_MD_Product Catalogue

(*) ATEX models available, contact our Sales Dept. for further information.

FA



available models

cable exit photoelectric sensors

M18 cylindrical DC

model	distance	housing	adjustment	4 wires (axial optic)		4 wires (right angle optic)	
				NPN NO + NC	PNP NO + NC	NPN NO + NC	PNP NO + NC
diffuse reflection	100 mm	plastic	-	FAR2/BN-0A	FAR2/BP-0A	FAR2/BN-2A	FAR2/BP-2A
			●	FAR3/BN-0A	FAR3/BP-0A	FAR3/BN-2A	FAR3/BP-2A
		metallic	-	FAR2/BN-1A	FAR2/BP-1A	FAR2/BN-3A	FAR2/BP-3A
			●	FAR3/BN-1A	FAR3/BP-1A	FAR3/BN-3A	FAR3/BP-3A
	200 mm	plastic	-	FAI4/BN-0A	FAI4/BP-0A	FAI4/BN-2A	FAI4/BP-2A
			●	FAI5/BN-0A	FAI5/BP-0A	FAI5/BN-2A	FAI5/BP-2A
		metallic	-	FAI4/BN-1A	FAI4/BP-1A	FAI4/BN-3A	FAI4/BP-3A
			●	FAI5/BN-1A	FAI5/BP-1A	FAI5/BN-3A	FAI5/BP-3A
	400 mm	plastic	-	FAI6/BN-0A	FAI6/BP-0A	FAI6/BN-2A	FAI6/BP-2A
			●	FAI7/BN-0A	FAI7/BP-0A	FAI7/BN-2A	FAI7/BP-2A
		metallic	-	FAI6/BN-1A	FAI6/BP-1A	FAI6/BN-3A	FAI6/BP-3A
			●	FAI7/BN-1A	FAI7/BP-1A	FAI7/BN-3A	FAI7/BP-3A
retroreflective	5 m (axial)	plastic	-	FAIC/BN-0A	FAIC/BP-0A	FAIC/BN-2A	FAIC/BP-2A
			●	FAIM/BN-0A	FAIM/BP-0A	FAIM/BN-2A	FAIM/BP-2A
	4 m (90°)	metallic	-	FAIC/BN-1A	FAIC/BP-1A	FAIC/BN-3A	FAIC/BP-3A
			●	FAIM/BN-1A	FAIM/BP-1A	FAIM/BN-3A	FAIM/BP-3A
	4 m (axial)	plastic	-	FARP/BN-0A	FARP/BP-0A	FARP/BN-2A	FARP/BP-2A
			●	FARN/BN-0A	FARN/BP-0A	FARN/BN-2A	FARN/BP-2A
polarized	2.5 m (90°)	metallic	-	FARP/BN-1A	FARP/BP-1A	FARP/BN-3A	FARP/BP-3A
			●	FARN/BN-1A	FARN/BP-1A	FARN/BN-3A	FARN/BP-3A
trasparents	0.1...1.5 m	plastic	●	FARL/BN-0A	FARL/BP-0A	FARL/BN-2A	FARL/BP-2A
		metallic	●	FARL/BN-1A	FARL/BP-1A	FARL/BN-3A	FARL/BP-3A
through-beam	20 m (axial)	plastic	emitter	FAIH/00-0A		FAIH/00-2A	
			emitt. + check	FAIH/X0-0A		FAIH/X0-2A	
			receiver	FAIZ/BN-0A	FAIZ/BP-0A	FAIZ/BN-2A	FAIZ/BP-2A
			adj. receiver	FAID/BN-0A	FAID/BP-0A	FAID/BN-2A	FAID/BP-2A
	15 m (90°)	metallic	emitter	FAIH/00-1A		FAIH/00-3A	
			emitt. + check	FAIH/X0-1A		FAIH/X0-3A	
			receiver	FAIZ/BN-0A	FAIZ/BP-0A	FAIZ/BN-2A	FAIZ/BP-2A
			adj. receiver	FAID/BN-1A	FAID/BP-1A	FAID/BN-3A	FAID/BP-3A

available models

plug cable exit photoelectric sensors



M18 cylindrical DC

model	distance	housing	adjustment	4 wires (axial optic)		4 wires (right angle optic)	
				NPN NO + NC	PNP NO + NC	NPN NO + NC	PNP NO + NC
diffuse reflection	100 mm	plastic	-	FAR2/BN-0E	FAR2/BP-0E	FAR2/BN-2E	FAR2/BP-2E
			●	FAR3/BN-0E	FAR3/BP-0E	FAR3/BN-2E	FAR3/BP-2E
		metallic	-	FAR2/BN-1E	FAR2/BP-1E	FAR2/BN-3E	FAR2/BP-3E
			●	FAR3/BN-1E	FAR3/BP-1E	FAR3/BN-3E	FAR3/BP-3E
	200 mm	plastic	-	FAI4/BN-0E	FAI4/BP-0E	FAI4/BN-2E	FAI4/BP-2E
			●	FAI5/BN-0E	FAI5/BP-0E	FAI5/BN-2E	FAI5/BP-2E
		metallic	-	FAI4/BN-1E	FAI4/BP-1E	FAI4/BN-3E	FAI4/BP-3E
			●	FAI5/BN-0E	FAI5/BP-0E	FAI5/BN-2E	FAI5/BP-2E
	400 mm	plastic	-	FAI6/BN-0E	FAI6/BP-0E	FAI6/BN-2E	FAI6/BP-2E
			●	FAI7/BN-0E	FAI7/BP-0E	FAI7/BN-2E	FAI7/BP-2E
		metallic	-	FAI6/BN-1E	FAI6/BP-1E	FAI6/BN-3E	FAI6/BP-3E
			●	FAI7/BN-1E	FAI7/BP-1E	FAI7/BN-3E	FAI7/BP-3E
1.000 mm (axial)	plastic	●	FAI8/BN-0E	FAI8/BP-0E	FAI8/BN-2E	FAI8/BP-2E	
	800 mm (90°)	metallic		FAI8/BN-1E	FAI8/BP-1E	FAI8/BN-3E	FAI8/BP-3E
retroreflective	5 m (axial)	plastic	-	FAIC/BN-0E	FAIC/BP-0E	FAIC/BN-2E	FAIC/BP-2E
			●	FAIM/BN-0E	FAIM/BP-0E	FAIM/BN-2E	FAIM/BP-2E
	4 m (90°)	metallic	-	FAIC/BN-1E	FAIC/BP-1E	FAIC/BN-3E	FAIC/BP-3E
			●	FAIM/BN-1E	FAIM/BP-1E	FAIM/BN-3E	FAIM/BP-3E
polarized	4 m (axial)	plastic	-	FARP/BN-0E	FARP/BP-0E	FARP/BN-2E	FARP/BP-2E
			●	FARN/BN-0E	FARN/BP-0E	FARN/BN-2E	FARN/BP-2E
	2.5 m (90°)	metallic	-	FARP/BN-1E	FARP/BP-1E	FARP/BN-3E	FARP/BP-3E
			●	FARN/BN-1E	FARN/BP-1E	FARN/BN-3E	FARN/BP-3E
trasparents	0,1...1.5 m	plastic	●	FARL/BN-0E	FARL/BP-0E	FARL/BN-2E	FARL/BP-2E
		metallic		FARL/BN-1E	FARL/BP-1E	FARL/BN-3E	FARL/BP-3E
through-beam	20 m (axial) 15 m (90°)	plastic	emitter	FAIH/00-0E		FAIH/00-2E	
			emitt. + check	FAIH/X0-0E		FAIH/X0-2E	
			receiver	FAIZ/BN-0E	FAIZ/BP-0E	FAIZ/BN-2E	FAIZ/BP-2E
			adj. receiver	FAID/BN-0E	FAID/BP-0E	FAID/BN-2E	FAID/BP-2E
		metallic	emitter	FAIH/00-1E		FAIH/00-3E	
			emitt. + check	FAIH/X0-1E		FAIH/X0-3E	
			receiver	FAIZ/BN-0E	FAIZ/BP-0E	FAIZ/BN-2E	FAIZ/BP-2E
			adj. receiver	FAID/BN-1E	FAID/BP-1E	FAID/BN-3E	FAID/BP-3E



technical specification

direct reflection models

M18 cylindrical DC

	red LED emission	
	FAR2/B*-**	FAR3/B*-**
		
nominal sensing distance	100 mm ⁽¹⁾	
emission	red (660 nm)	
hysteresis	≤ 10 %	
repeatability	5 %	
operating voltage	10...30 Vcc	
ripple	≤ 10 %	
no-load supply current	30 mA	
load current	100 mA	
leakage current	10 µA	
output voltage drop	2 V max. IL = 100 mA	
output type	NPN or PNP NO + NC	
switching frequency	250 Hz	
power on delay	200 ms	
power supply protections	polarity reversal, impulsive overvoltage	
output protection	Short circuit (autoreset) Overvoltage	
sensitivity adjustment	-	●
operating temperature range	- 25°C...+ 70°C (without freeze)	
temperature drift	10 % Sr	
protection degree	IP67 (EN60529) ⁽⁴⁾	
EMC	in conformity with the EMC Directive according to EN 60947-5-2	
external light interference	3,000 lux (incandescence lamp), 10,000 lux (sunlight)	
LEDs	Yellow (Light status) or (output status in the LO/DO special versions)	
housing material	PBT (plastic) / nicked plated brass (metallic) / PC (cable exit)	
optic material	PC	
tightening torque	1 Nm (plastic), 25 Nm (metallic)	
weight (approximate)	plastic version: 30 g connector / 50 g cable metallic version: 100 g connector / 130 g cable	

⁽¹⁾ White target kodak 90% reflection 100 x 100 mm

⁽²⁾ Protection guaranteed only with plug cable well mounted

	infrared LED emission				
	FAI4/B*-.**	FAI5/B*-.**	FAI6/B*-.**	FAI7/B*-.**	FAI8/B*-.**
					
nominal sensing distance	200 mm ⁽¹⁾		400 mm ⁽²⁾		1,000 mm ⁽³⁾ (axial) 800 mm ⁽³⁾ (90°)
emission	infrared (880 nm)				
hysteresis	≤ 10 %				
repeatability	5 %				
operating voltage	10...30 Vcc				
ripple	≤ 10 %				
no-load supply current	30 mA				
load current	100 mA				
leakage current	10 µA				
output voltage drop	2 V max. IL = 100 mA				
output type	NPN or PNP NO + NC				
switching frequency	250 Hz				
power on delay	200 ms				
power supply protections	polarity reversal, impulsive overvoltage				
output protection	Short circuit (autoreset) Overvoltage				
sensitivity adjustment	●	-			●
operating temperature range	- 25°C...+ 70°C (without freeze)				
temperature drift	10 % Sr				
protection degree	IP67 (EN60529) ⁽⁴⁾				
EMC	in conformity with the EMC Directive according to EN 60947-5-2				
external light interference	3,000 lux (incandescence lamp), 10,000 lux (sunlight)				
LEDs	Yellow (Light status) or (output status in the LO/DO special versions)				
housing material	PBT (plastic) / nicked plated brass (metallic) / PC (cable exit)				
optic material	PC				
tightening torque	1 Nm (plastic), 25 Nm (metallic)				
weight (approximate)	plastic version: 30 g plug / 50 g cable metallic version: 100 g plug / 130 g cable				

⁽¹⁾ White target kodak 90% reflection 100 x 100 mm ⁽²⁾ White target kodak 90% reflection 200 x 200 mm ⁽³⁾ White target kodak 90% reflection 400 x 400 mm

⁽⁴⁾ Protection guaranteed only with plug cable well mounted



technical specification

reflex and polarized models

M18 cylindrical DC

	retroreflective		polarized		transparent objects detection
	FAIC/B*-** (1)	FAIM/B*-** (1)	FARP/B*-** (1)	FARN/B*-** (1)	FARL/B*-** (2)
					
nominal sensing distance	5 m (axial), 4 m (radial)		4 m (axial), 2.5 m (radial)		1.5 m
emission	infrared (880 nm)		red (660 nm)		
hysteresis	≤ 10 %				
repeatability	5 %				
operating voltage	10...30 Vdc				
ripple	≤ 10 %				
no-load supply current	30 mA				
load current	100 mA				
leakage current	≤ 10 µA				
output voltage drop	2 V max. IL = 100 mA				
output type	NPN or PNP NO + NC				
switching frequency	250 Hz				
power on delay	200 ms				
power supply protections	polarity reversal, impulsive overvoltage				
output protection	Short circuit (autoreset) Overvoltage				
sensitivity adjustment	-	●	-	●	
operating temperature range	- 25°C...+ 70°C (without freeze)				
temperature drift	10 % Sr				
protection degree	IP67 (EN60529) ⁽³⁾				
EMC	in conformity with the EMC Directive according to EN 60947-5-2				
external light interference	5000 lux (incandescence lamp), 10.000 lux (sunlight)				
LEDs	Yellow (Light status) or (output status in the LO/DO special versions)				
housing material	PBT (plastic) / nicked plated brass (metallic) / PC (cable exit)				
optic material	PC		plastic		PC
tightening torque	1 Nm (plastic), 25 Nm (metallic)				
weight (approximate)	plastic version: 30 g plug / 50 g cable metallic version: 100 g plug / 130 g cable				

(1) With RL 110 reflector (2) With RL 113G or RL 116 reflector (3) Protection guaranteed only with plug cable well mounted


	emitter		receiver	
	FAIH/X0-**	FAIH/00-**	FAIZ/B*-**	FAID/B*-**
				
nominal sensing distance	20 m axial model / 15 m right angle model			
emission	infrared (880 nm)			
hysteresis	≤ 10 %			
repeatability	5 %			
operating voltage	10...30 Vdc			
ripple	≤ 10 %			
no-load supply current	25 mA			
load current	-		100 mA	
leakage current	-		10 µA	
output voltage drop	-		2 V max. IL = 100 mA	
output type	-		NPN or PNP NO + NC	
switching frequency	-		250 Hz	
power on delay	-		200 ms	
power supply protections	impulsive overvoltage polarity reversal			
output protection	-		Short circuit (autoreset) - Overvoltage	
sensitivity adjustment	-		-	●
operating temperature range	- 25°C...+ 70°C (without freeze)			
temperature drift	10 % Sr			
check input	BK/2 connected to 0 V switches off the emission	-		
EMC	in conformity with the EMC Directive according to EN 60947-5-2			
protection degree	IP67 (EN60529) ⁽¹⁾			
external light interference	5,000 lux (incandescence lamp), 10,000 lux (sunlight)			
LEDs	green (power ON)		Yellow (light state or output status in the special LO/DO versions)	
housing material	PBT (plastic) / nicked plated brass (metallic) / PC (cable exit)			
optic material	PC			
tightening torque	1 Nm (plastic), 25 Nm (metallic)			
weight (approximate)	plastic version: 30 g connector / 50 g cable metallic version: 100 g connector / 130 g cable			

⁽¹⁾ Protection guaranteed only with plug cable well mounted




M18 cylindrical DC

electrical diagrams of the connections

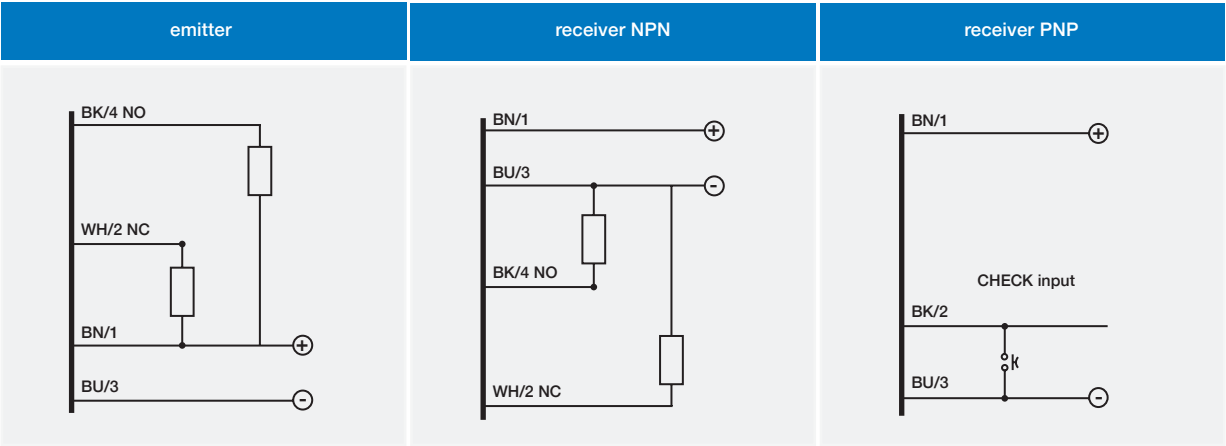


plug

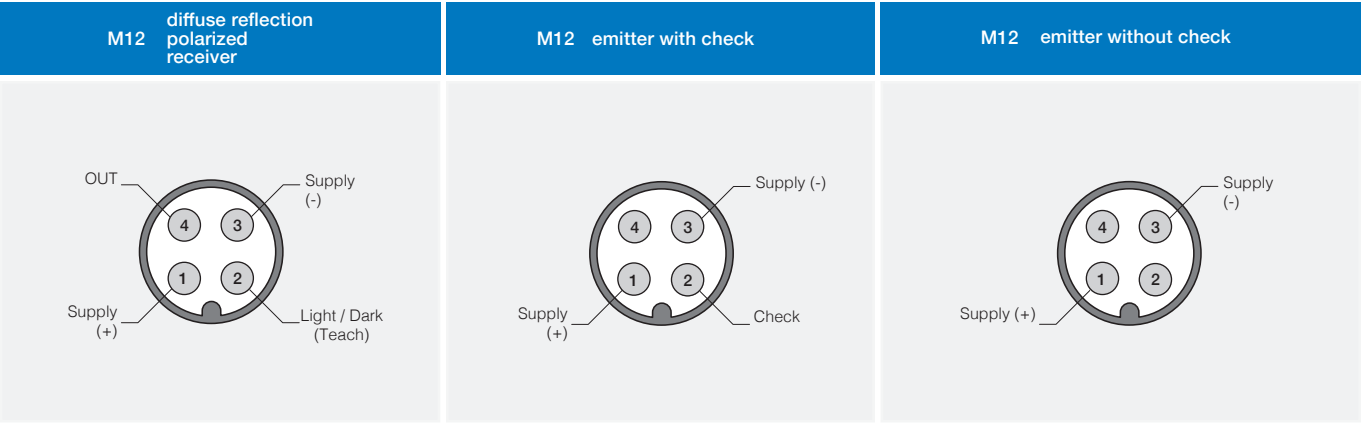

response diagram


direct diffuse models

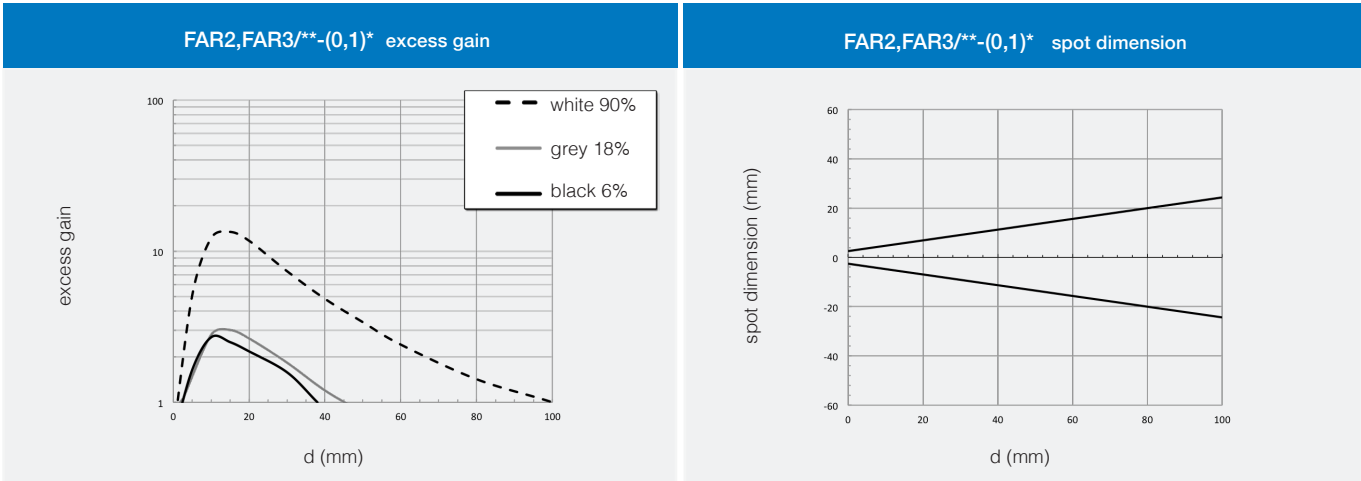


FA




FAR2,FAR3/**-(0,1)* parallel displacement

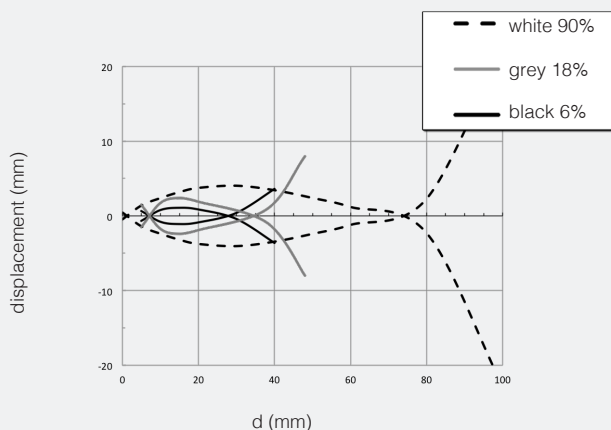


FAR2,FAR3/**-(2,3)* excess gain

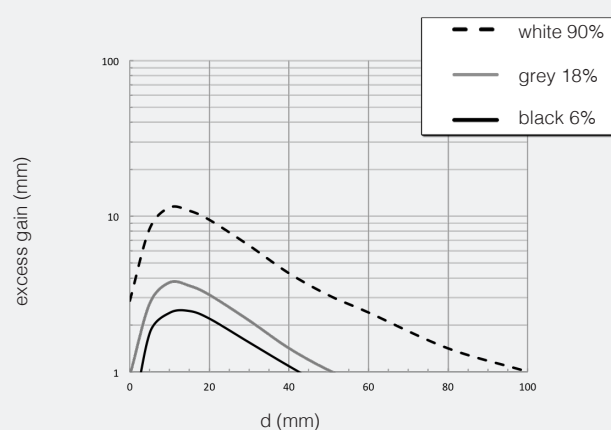


FAR2,FAR3/**-(2,3)* spot dimension

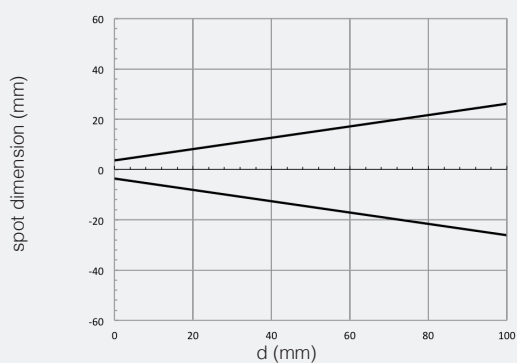


FAR2,FAR3/**-(2,3)* parallel displacement

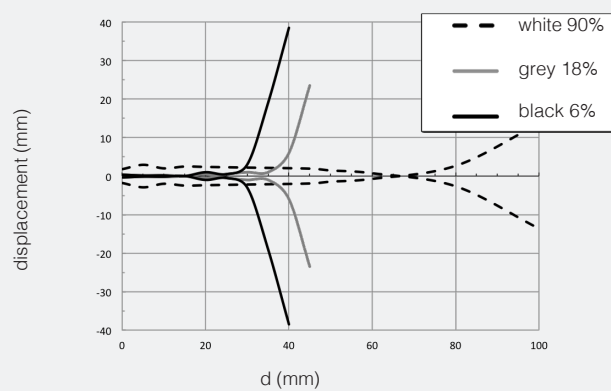


FAI4, FAI5/**-(0,1)* excess gain

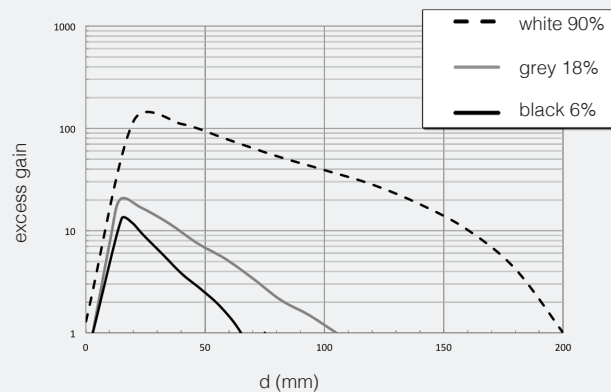


FAI4, FAI5/**-(0,1)* spot dimension

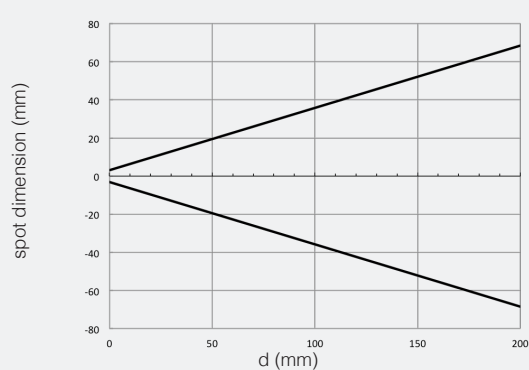

FAI4, FAI5/**-(0,1)* parallel displacement

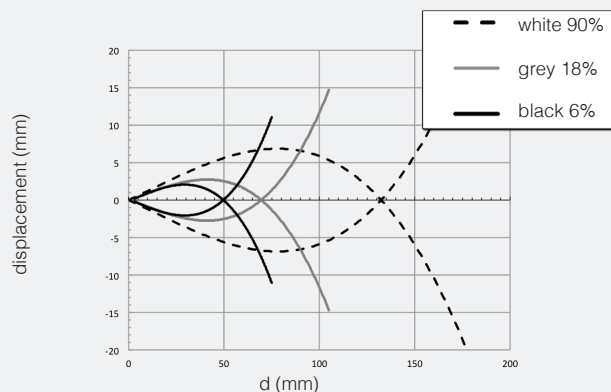

FAI4, FAI5/**-(2,3)* excess gain

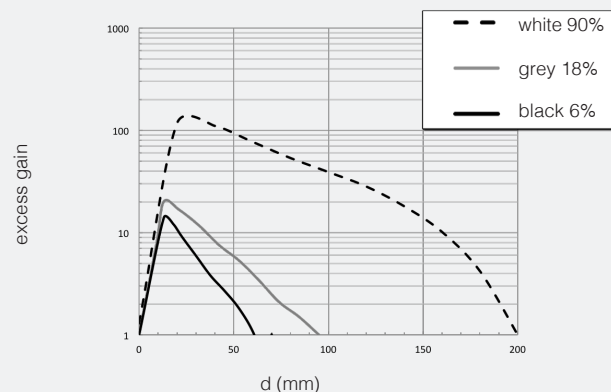





response diagrams

direct diffuse models


FAI4, FAI5/**-(2,3)* spot dimension

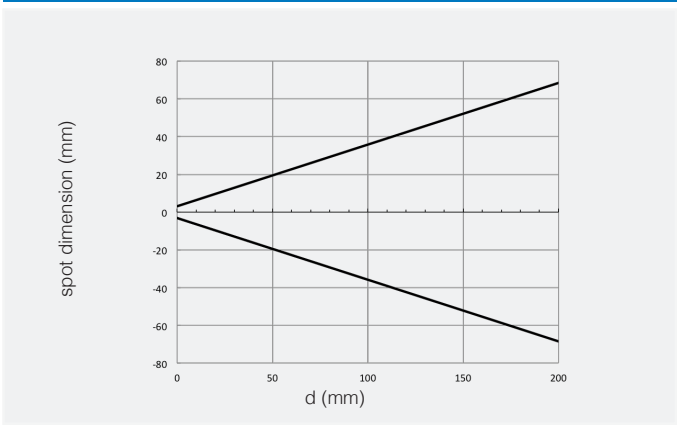


FAI4, FAI5/**-(2,3)* parallel displacement

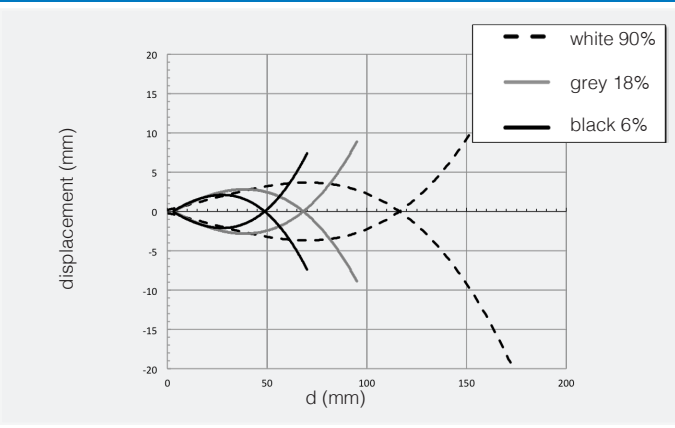


FAI6,FAI7/**-(0,1)* excess gain

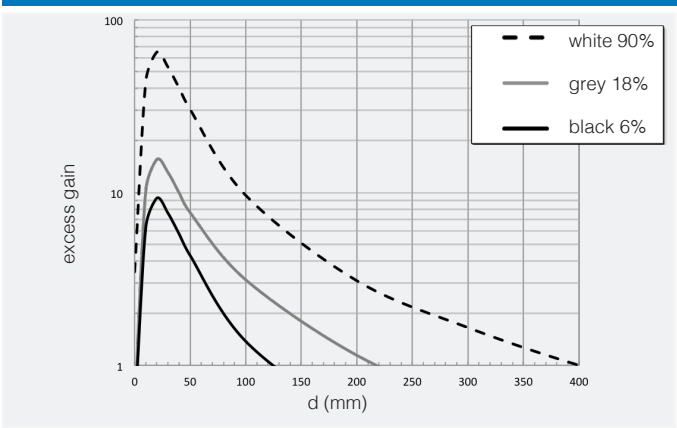


FAI6,FAI7/**-(0,1)* spot dimension

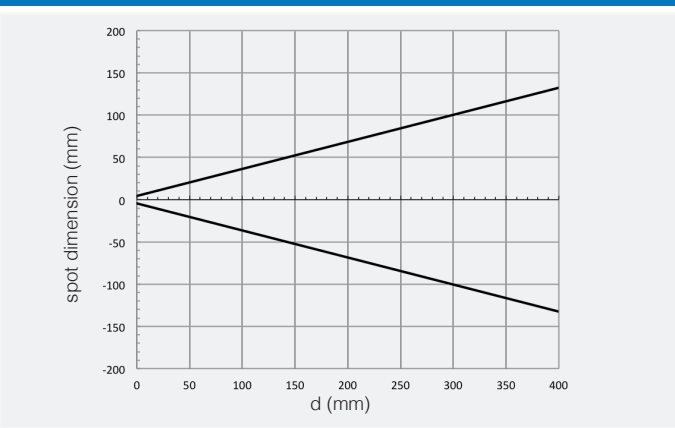


FAI6,FAI7/**-(0,1)*parallel displacement

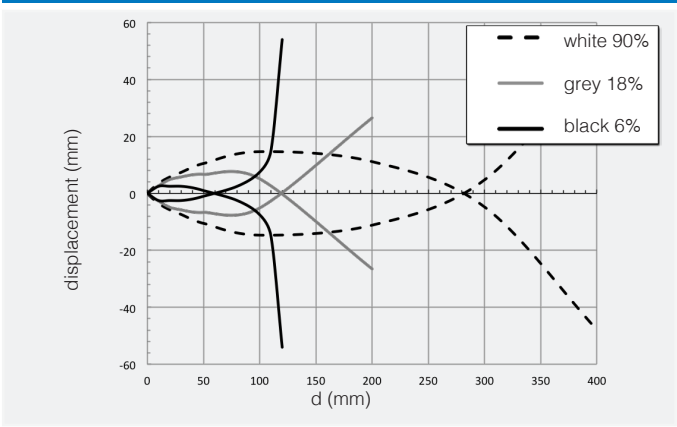


FAI6,FAI7/**-(2,3)* excess gain

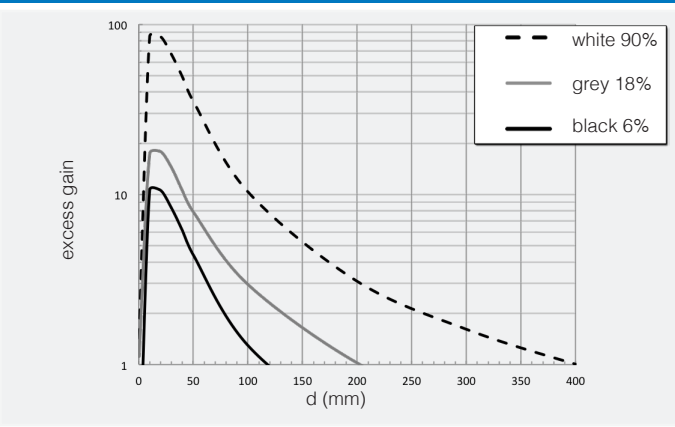


FAI6,FAI7/**-(2,3)* spot dimension

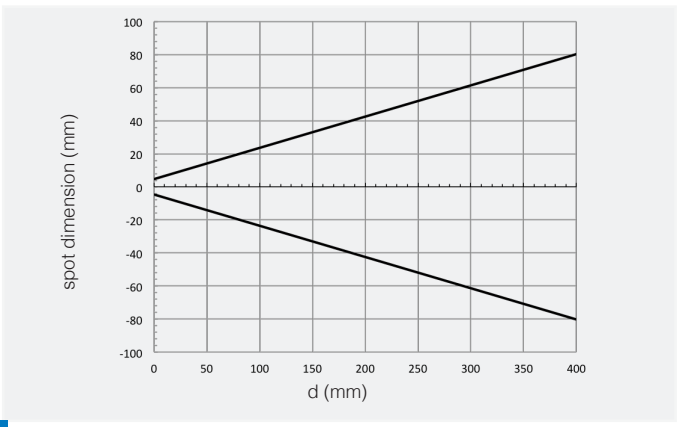


FAI6,FAI7/**-(2,3)* parallel displacement

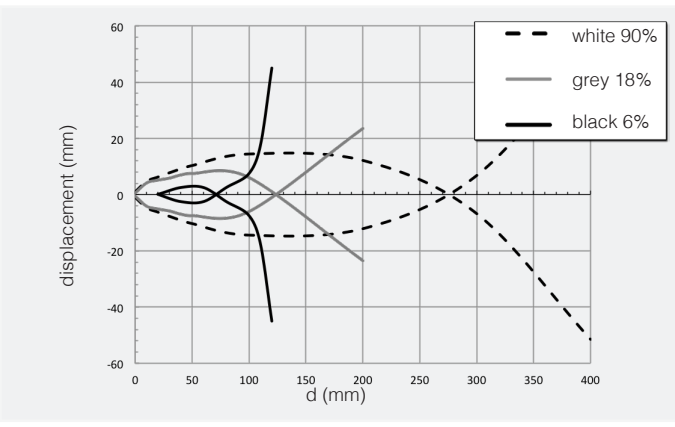


FAI8/**-(0,1)* excess gain

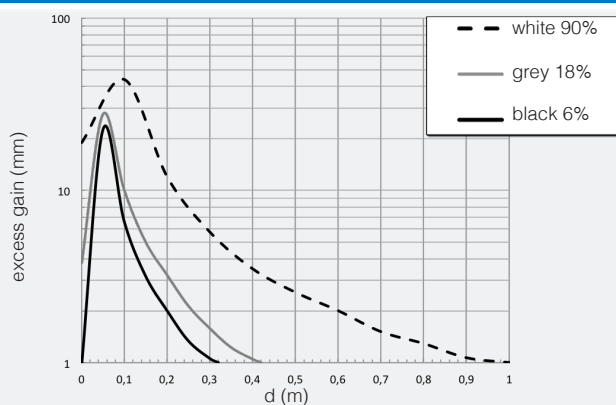


FAI8/**-(0,1)* spot dimension

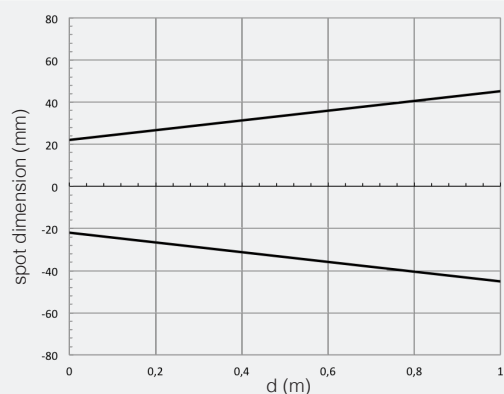


FAI8/**-(0,1)* parallel displacement

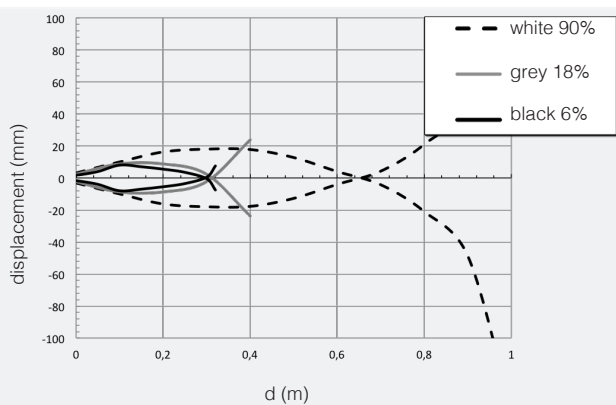


FAI8/**-(2,3)* excess gain

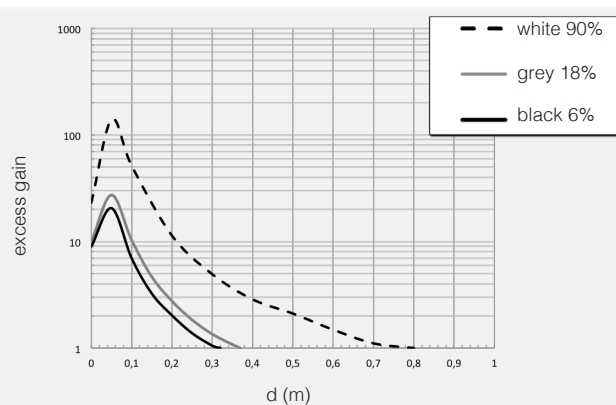

FAI8/**-(2,3)* spot dimension

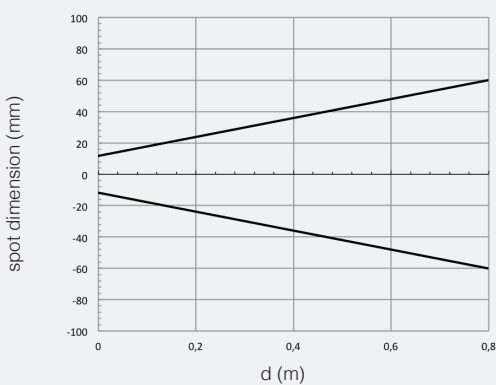

FAI8/**-(2,3)* parallel displacement

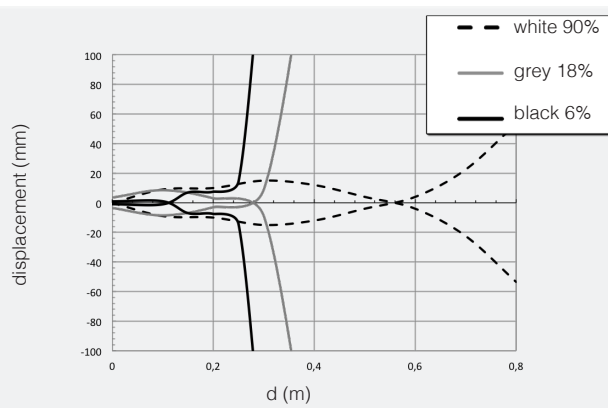





response diagrams

retro-reflective models


FAIC,FAIM/**-(0,1)* excess gain

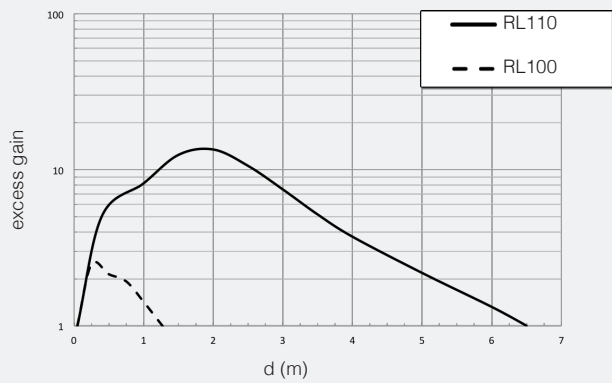


FAIC,FAIM/**-(0,1)* spot dimension

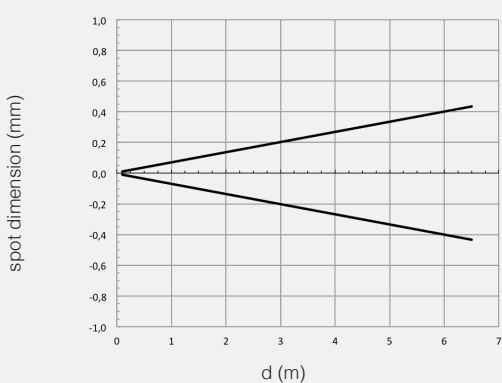


FAIC,FAIM/**-(0,1)* parallel displacement

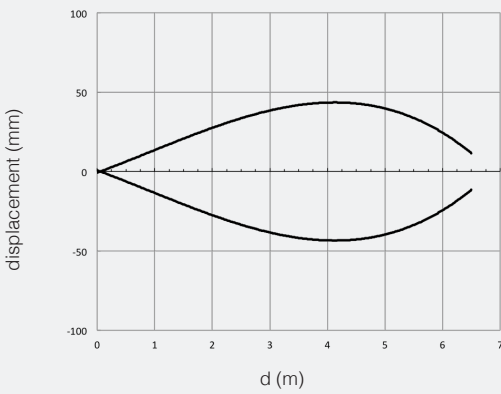


FAIC,FAIM/**-(2,3)* excess gain

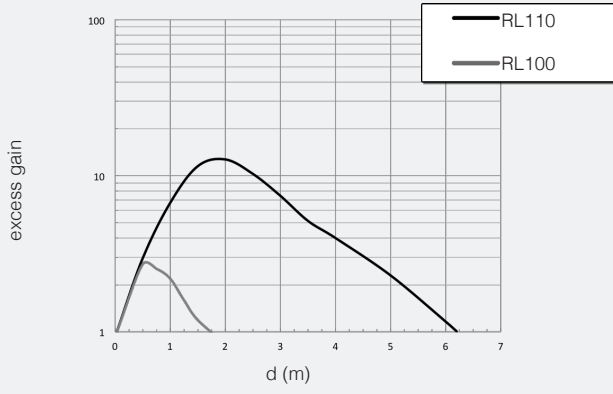


FAIC,FAIM/**-(2,3)* spot diameter

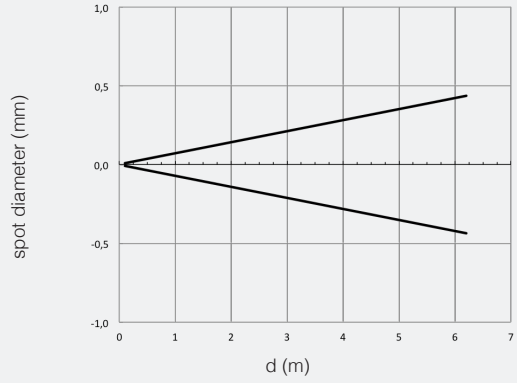


FAIC,FAIM/**-(2,3)* parallel displacement

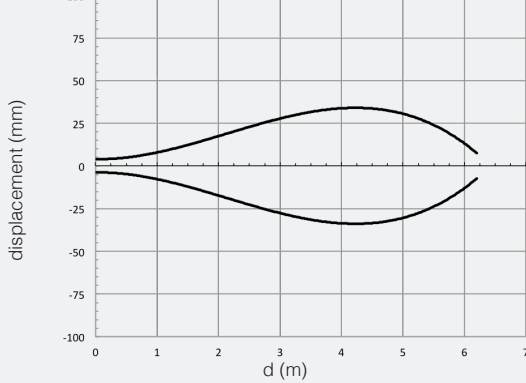


FARP,FARN/**-(0,1)* excess gain

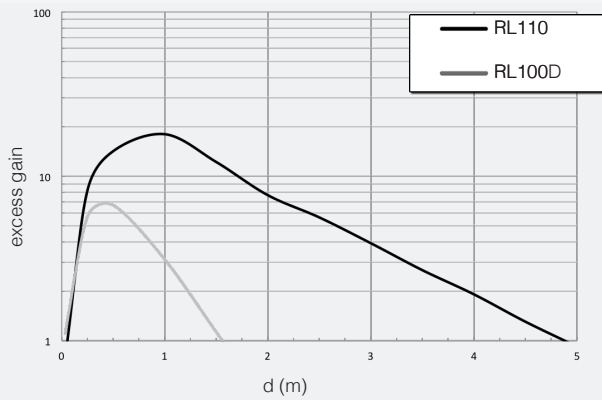


FARP,FARN/**-(0,1)* spot diameter

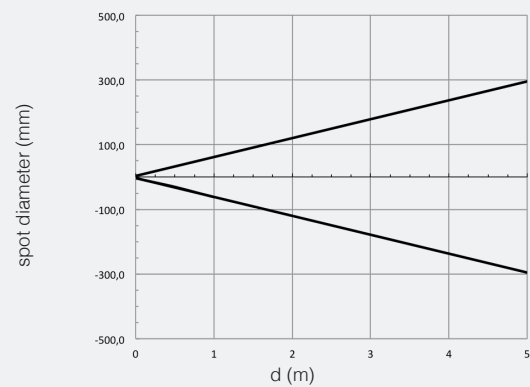


FARP,FARN/**-(0,1)* parallel displacement

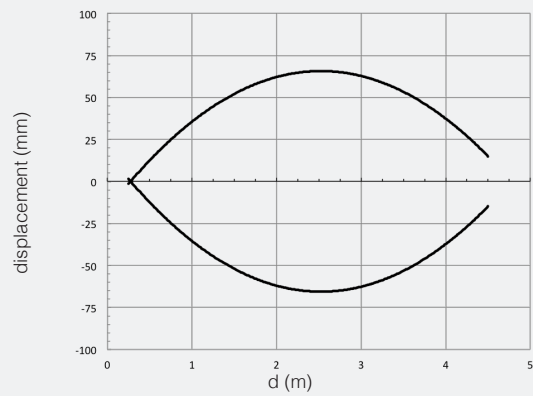


FARP,FARN/**-(2,3)* excess gain

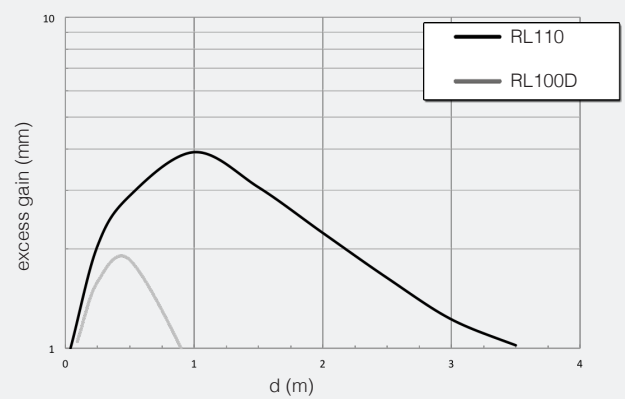

FARP,FARN/**-(2,3)* spot diameter

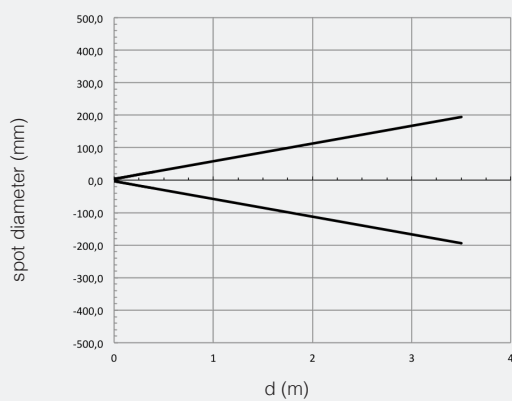


FARP,FARN/**-(2,3)* parallel displacement

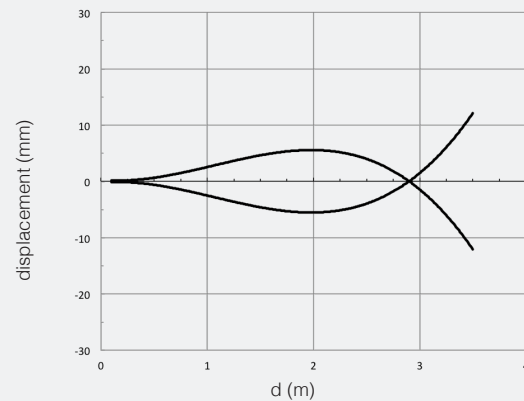




response diagrams

polarized models for transparent objects (diagrams calculated with RL110)

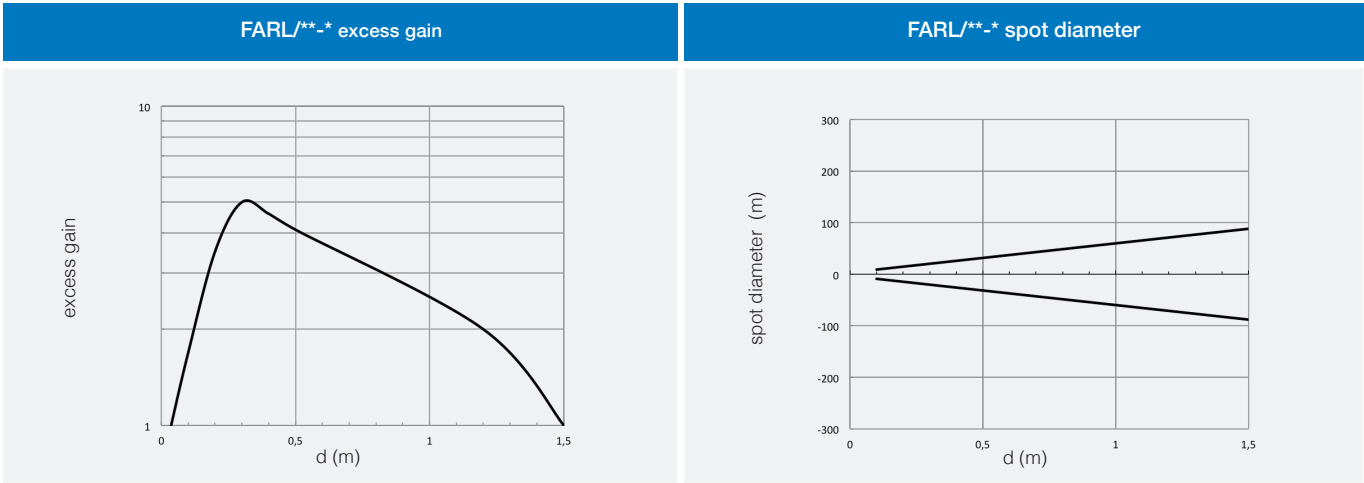


response diagrams

polarized models for transparent objects

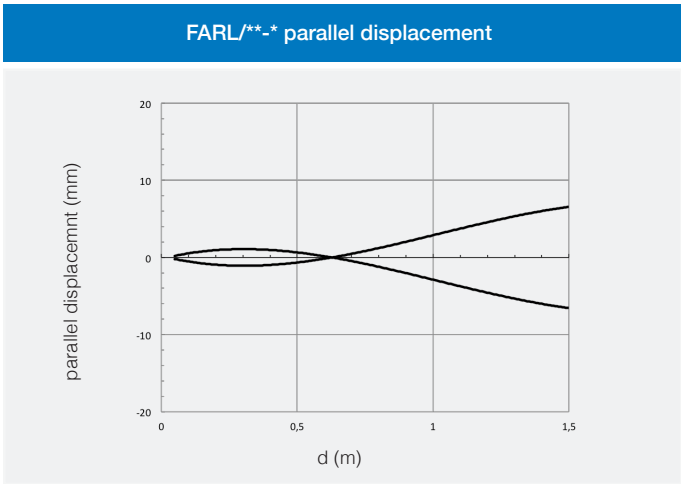


response diagrams

through beam models

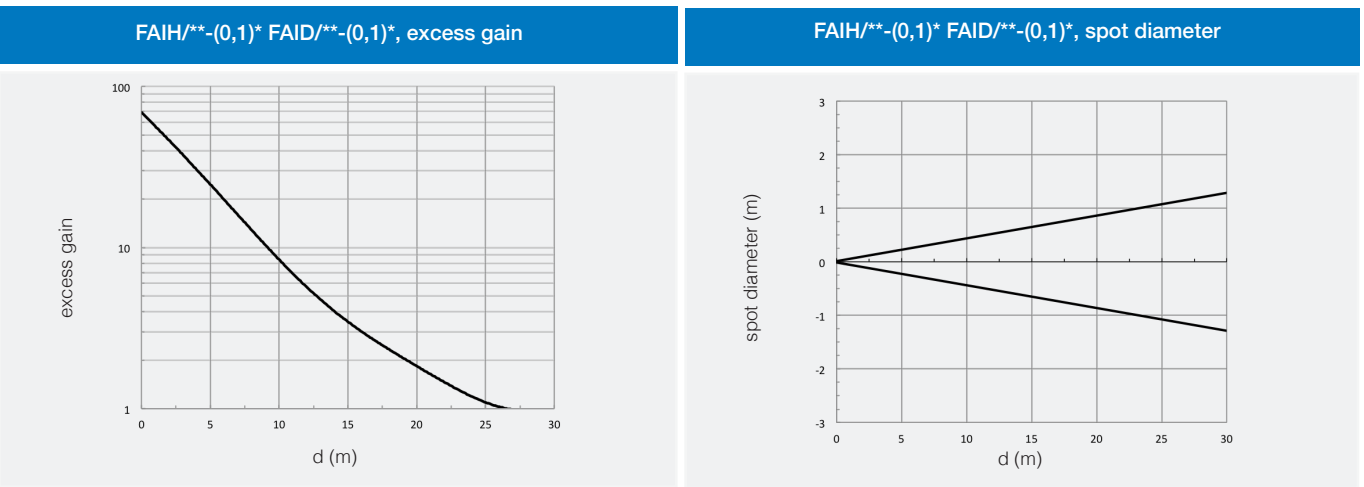




FAIH/**-(0,1)* FAID/**-(0,1)*, parallel displacement

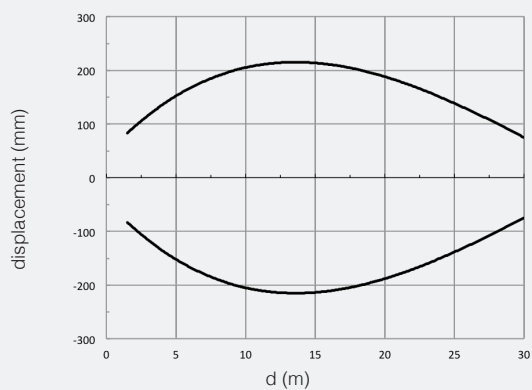


response diagrams

through beam models


FAIH/**-(2,3)* FAID/**-(2,3)*, excess gain

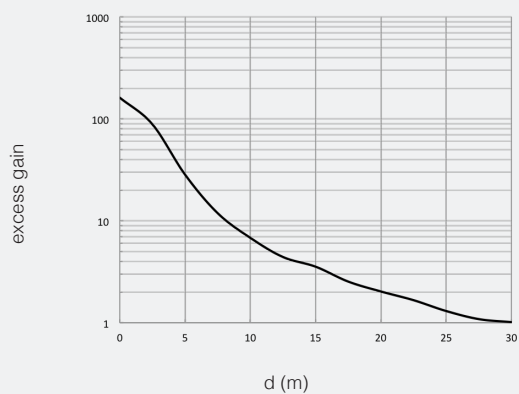

FAIH/**-(2,3)* FAID/**-(2,3)*, spot diameter

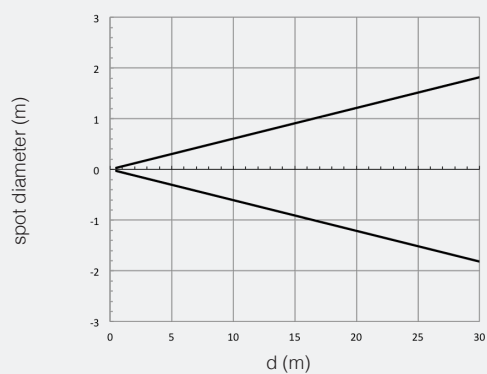


FAIH/**-(2,3)* FAID/**-(2,3)*, parallel displacement

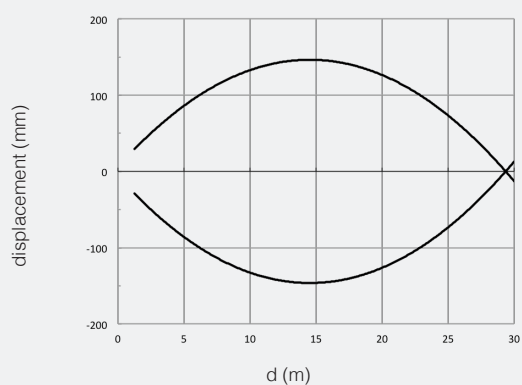



M18 cylindrical DC


dimensions (mm)

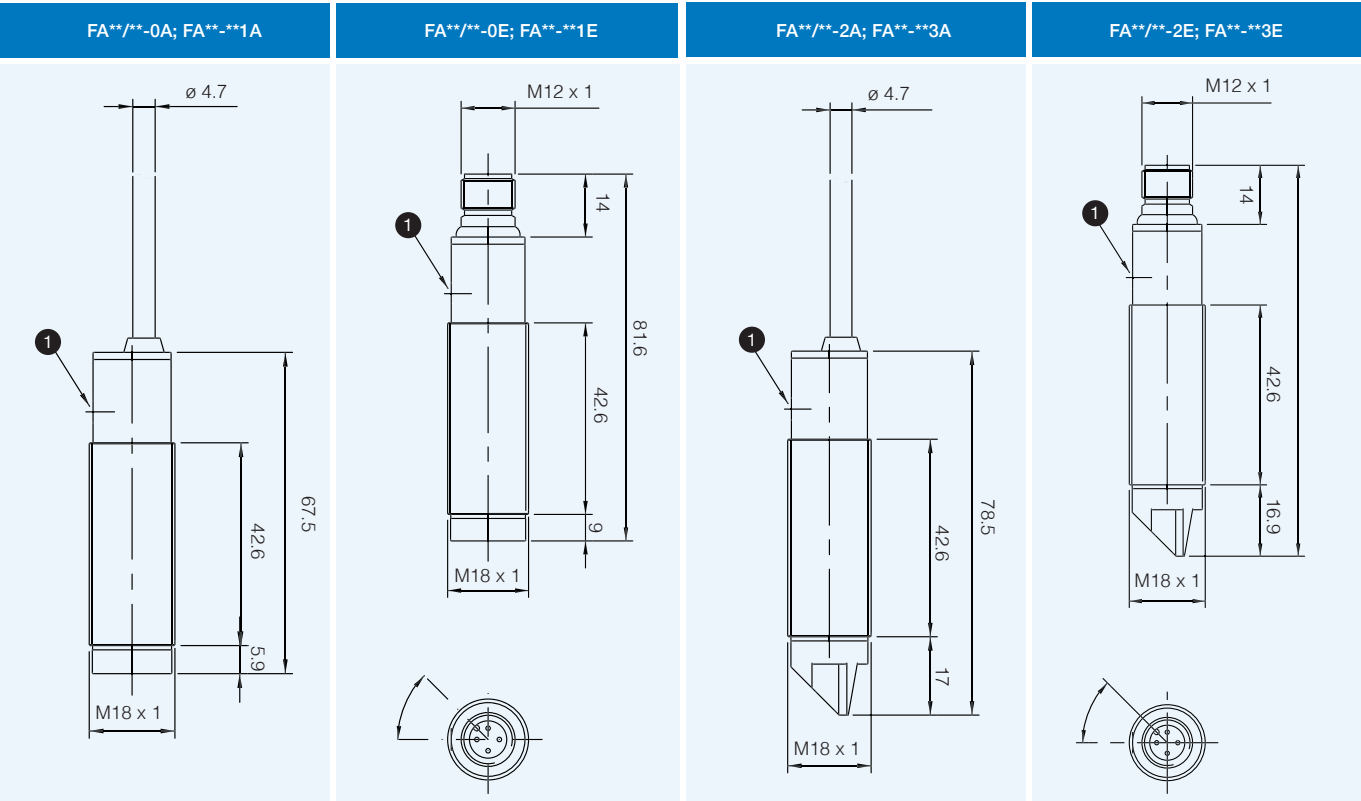

1 Trimmer for sensibility regulation

dimensions (mm)

accessories included in all plastic models

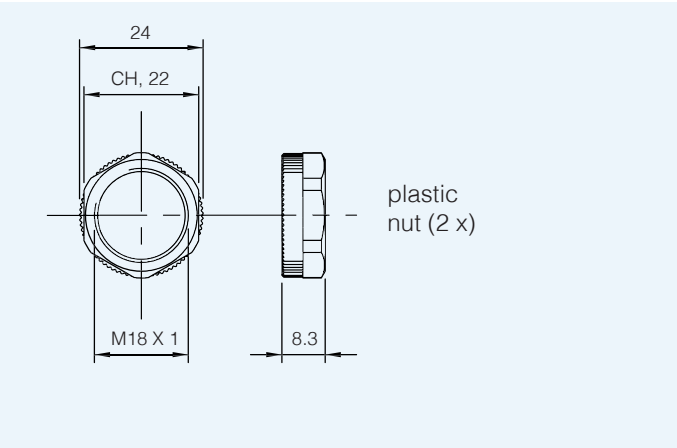

dimensions (mm)

accessories included in all metallic models

