SENSOPART

Salesletter

SensoClip F25




made in Germany

overview

SENSOPART

- highlights
- variants
- advantages
- positioning/competition

highlights

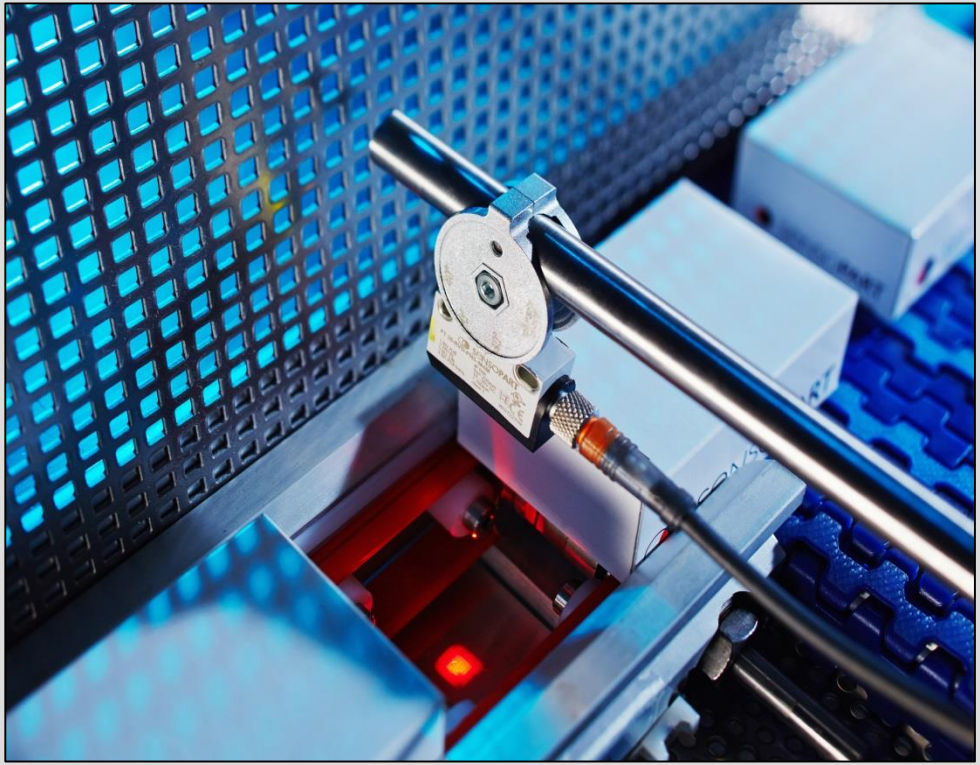

- fast and simple mounting
- dove tail system makes it adjustable in every direction
- mountable on rods ø12mm and square profiles 10x10mm
- protective bracket and hand wheel available (set)
- angle indication +/- 40°
- low-priced


overview


- highlights
- variants
- advantages
- positioning/competition


variants - standard

MBD F 25ST2

661-01005

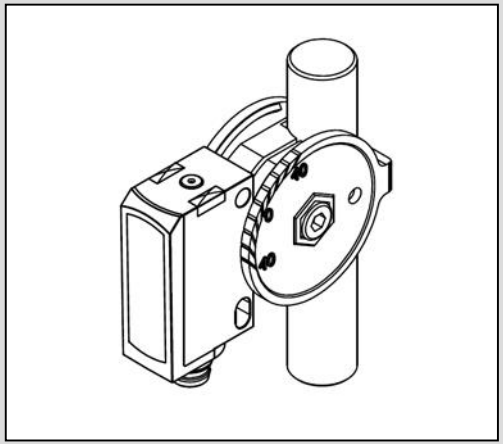

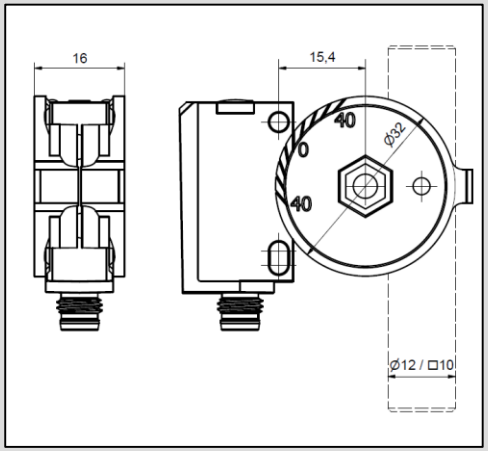


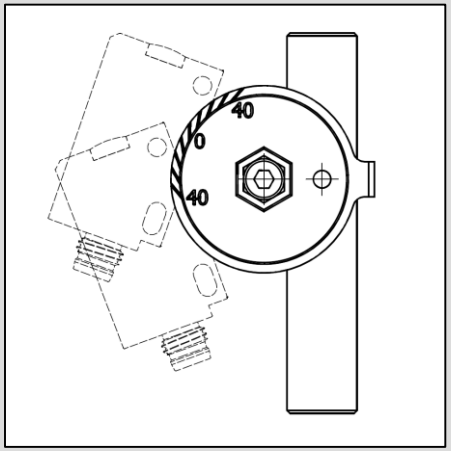



- SensoClip (zinc diecasting)

MBD F 25STP

661-01004

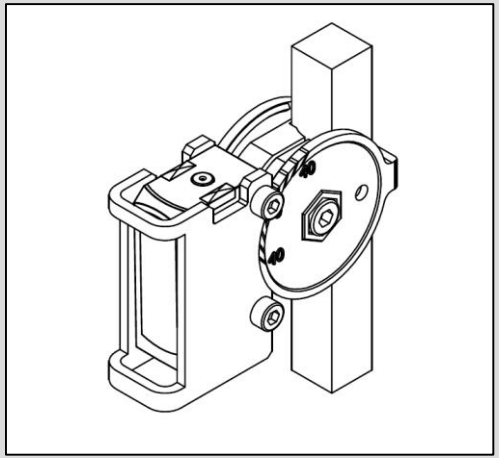

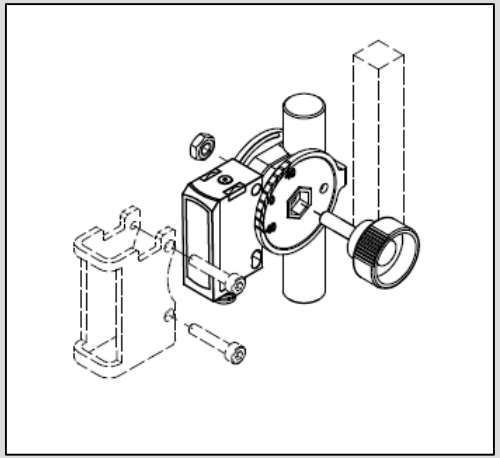

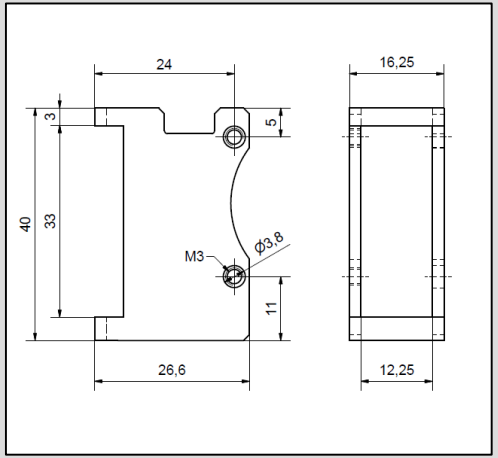



- SensoClip (zinc diecasting)
- protection bracket (stainless steel)
- hand wheel and mounting screws


variants

MB ST2

661-01007

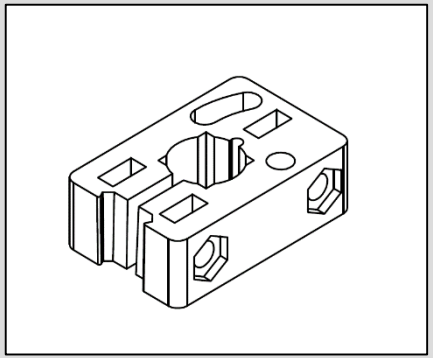


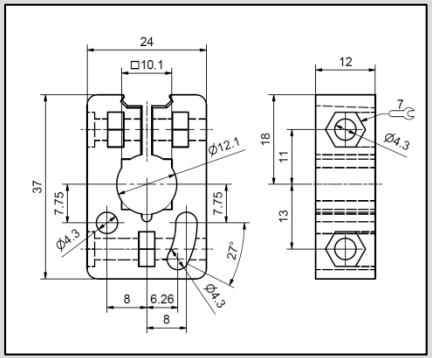


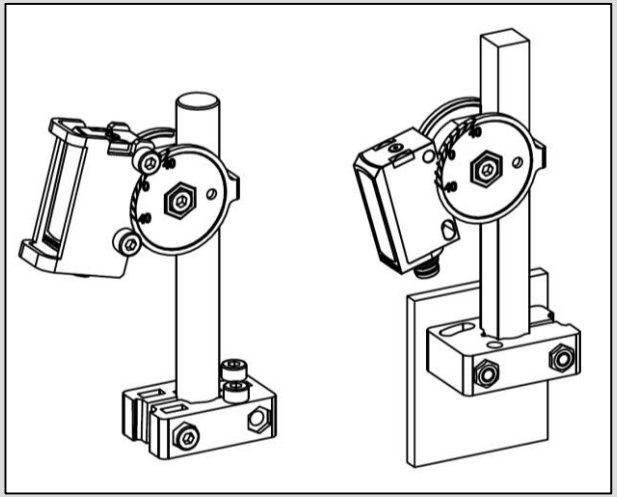

- mounting component for F55 / fork sensors (plastic)
- mounting brick for rods ø12mm and square profiles 10x10mm

➡ combination with SensoClip

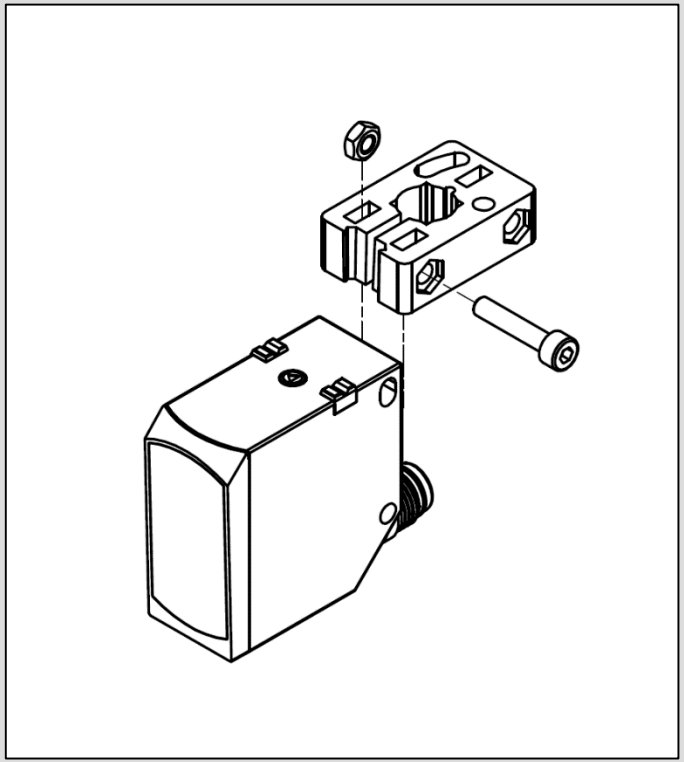

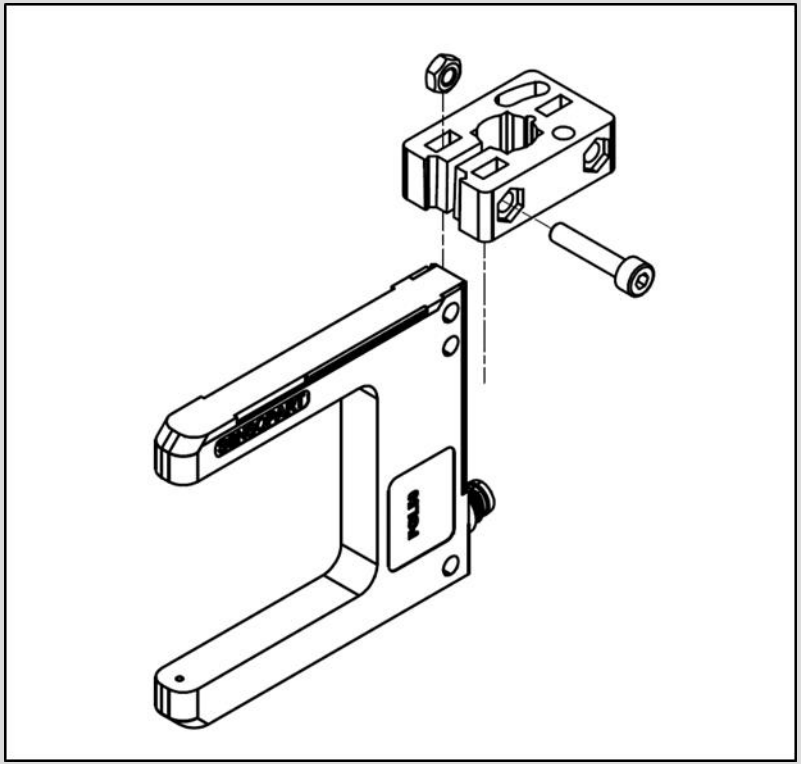





overview


SENSOPART

- highlights
- variants
- advantages
- positioning/competition

advantages

old


- twisting of the holding notch
- causes mounting problems

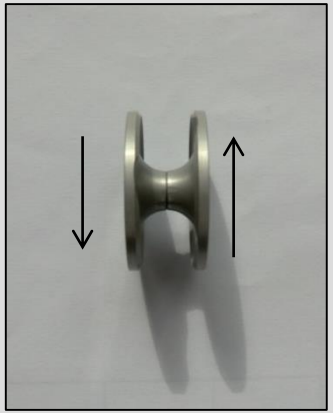

new

- fixing of the holding notch

➡ no twisting, fast and simple mounting

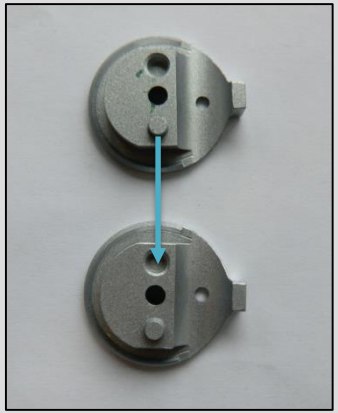

advantages


old

- mountable only on rods ø12mm

new

- mountable on rods ø12mm and square profiles 10x10mm

➡ very flexible adjustment, no twisting around the square profile, reproducible angle adjustment

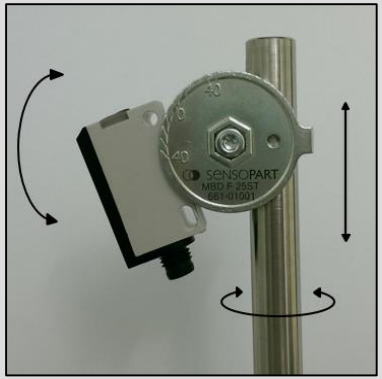



advantages




Every detail thought out!




advantages

new

- direct readable inclination angle +/- 40°
- additional bore hole: alternative mounting on flat surfaces, fixation on square profile
- protective bracket (set)
- Hand wheel (set)

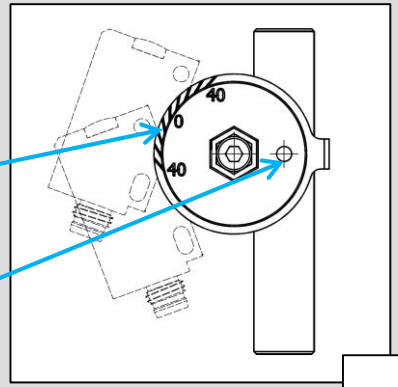

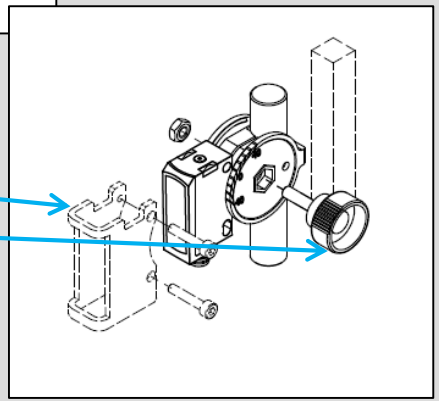


SENSOPART
Vision Sensor
VISOR V10-S
Object
SENSOPART