Teflon-Probe
S2 M18 3/5 L20-GS


Level control for:

- hot-melt adhesives
- waxes
- paints
- granulates
- chemicals

Technical data:

Enclosure material	PTFE (Teflon), nickel-coated brass
Enclosure rating EN 60529	IP65
Mounting position	Vertically
Permitted ambient temperature	0°C to +250°C
Connection	Shielded PTFE cable with connector
Cable length	2 m
Diameter SMA-connector	9 mm

Dimensions: Unit: mm

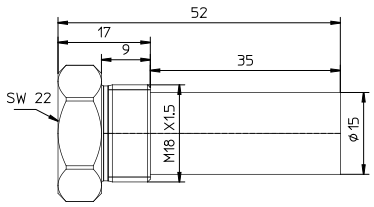

Operating Instructions:

Mounting instructions
The probe is only to be used together with the type CNS-506… (D, D-I, L-I) device. The probe cable is not to be laid parallel to the driving cables.

Operation
The scope of use compromises the liquid and solid medium with a maximum temperature of 250°C. During the functional test (setting), it is imperative that the test only be carried out using the medium which was actually called up. The optimal switching point is situated 5 to10 mm over the probe end. At this point the switching point must be adjust.

Maintenance
The probes are maintenance-free. Devices are only to be repaired or overhauled by the manufacturer.

General
Our devices are of a high technical quality. We reserve the right to make technical alterations which are designed to meet technical progress.

Tippkemper Elektronik GmbH & Co KG
Borgfeld 12, D-59302 Oelde, Germany, Tel. +49 (0) 25 29 / 93 01-50 Telefax +49 (0) 25 29 / 93 01-49
E-mail: info@tippkemper-elektronik.de