

Accessories

**Feedback sensor
IZS31-DF**



**Autobalance sensor
[High-precision type]
IZS31-DG**



**Autobalance sensor
[Body-mounting type]
IZS31-DE**

- Connection cable A/B (1 pc. each)
- Sensor bracket (1 pc.)
- Hexagon socket head cap screw for sensor bracket (2 pcs.)



Power supply cable
· IZS31-CP (3 m)
· IZS31-CPZ (10 m)



Connection cable A/B for connecting autobalance sensor to the body
· For driving:
IZS31-CF (12P)



· For I/O signals:
IZS31-CR (6P)



Electrode cartridge with rapid elimination of static electricity

- IZS31-NT (Material: Tungsten)
- IZS31-NC (Material: Silicon)
- IZS31-NS (Material: Stainless steel)




Electrode cartridge with low maintenance


- IZS31-NJ (Material: Tungsten)
- IZS31-NK (Material: Silicon)



End bracket/IZS31-BE

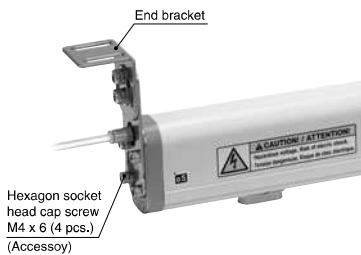

Center bracket/IZS31-BM




Note) The number of center brackets required, as listed below, depends on the bar length. Two end brackets are always required regardless of the bar length.

Bar length (mm)	Quantity	
	End bracket	Center bracket
300, 380, 620, 780		None
1100, 1260, 1500	2 pcs.	With 1 pc.
1900, 2300		With 2 pcs.

Note) The model number is for a single bracket.

**Sensor bracket/IZS31-BL
(For mounting IZS31-DE on the body)**

* Provided with 2 hexagon socket head cap screw for sensor bracket (2 pcs.)

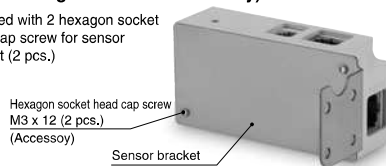

Pressure Sensor

Pressure Control

Flow Sensor

Position Detection Switch

Reduced-wiring Fieldbus System

Static Electricity Elimination Equipment

Length Measuring/Counter

Alphabetical Index